




# Zune Flash 2nd Generation Communications Board Replacement

Written By: ybahman

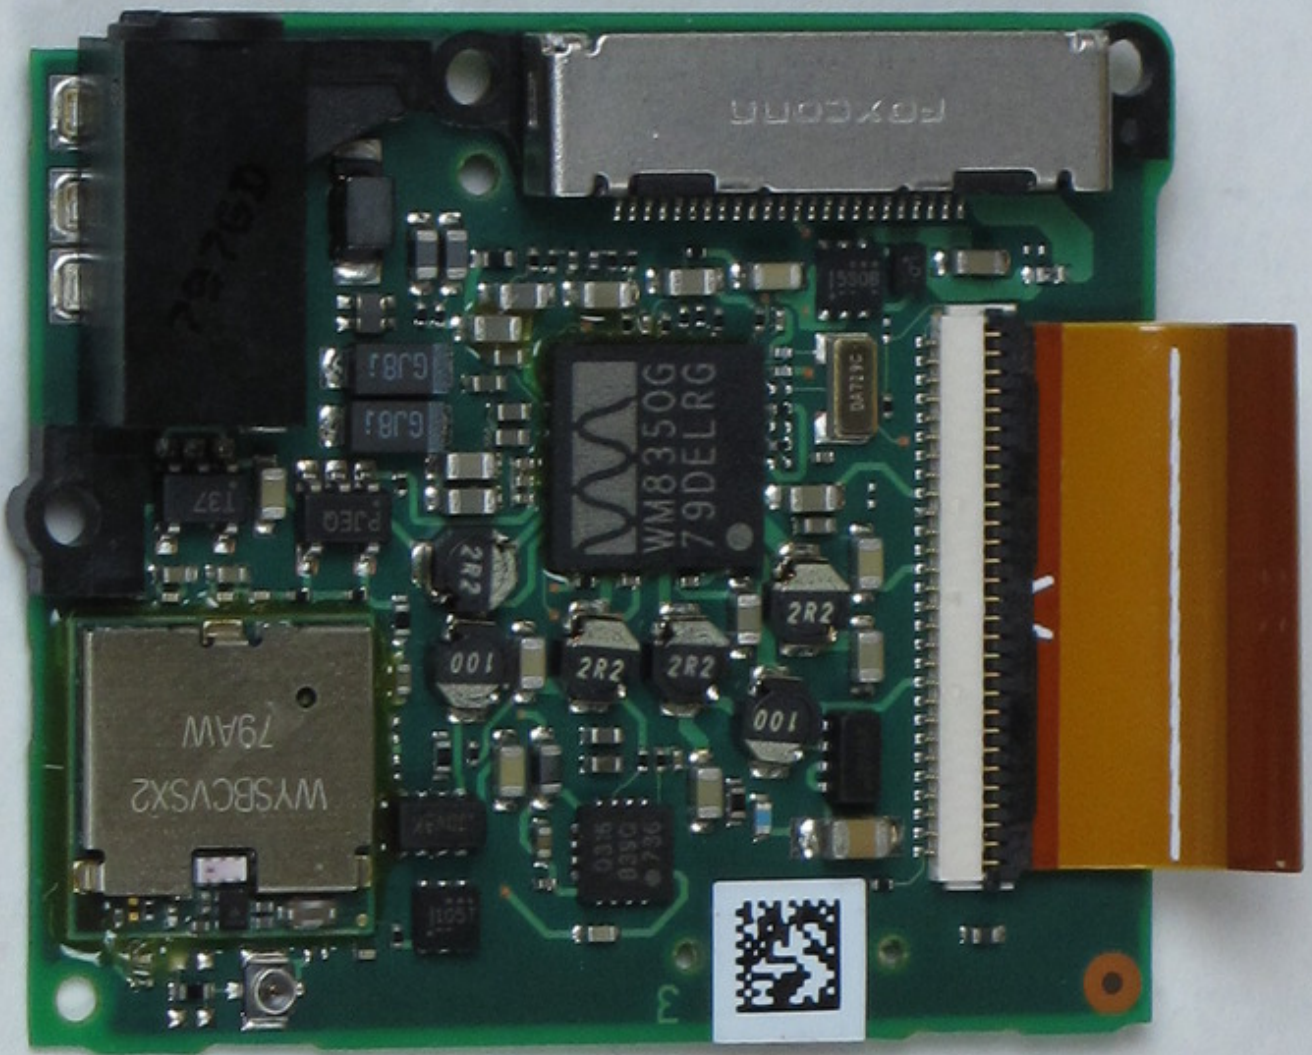

## INTRODUCTION

Guide for the removal and replacement of the communications board on the Zune Flash media player.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Metal Spudger](#) (1)
  - [Tri-wing Screwdriver](#) (1)
-

## Step 1 — Back Cover





- Prior to disassembly, verify the hold switch is engaged to ensure the device will not turn on during the procedure.
- If the device turns on while it is being disassembled it could cause irreversible damage to the device.

 PICS MAKE NO SENSE.




## Step 2

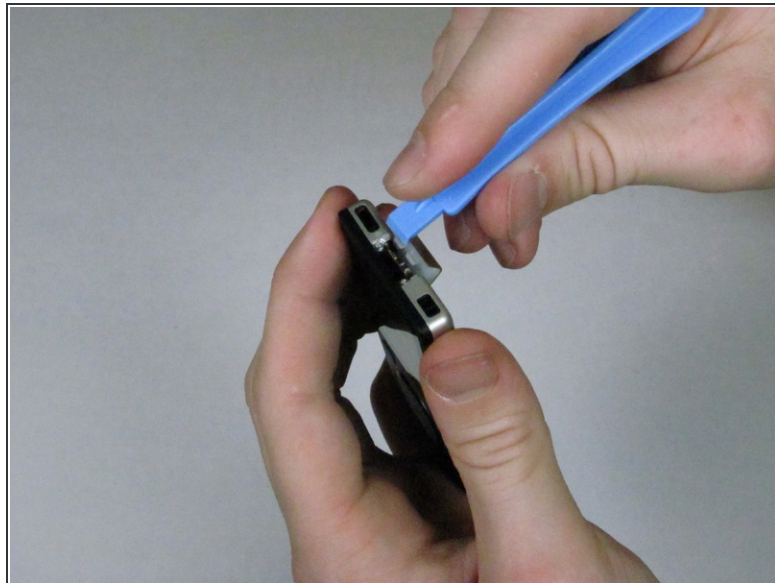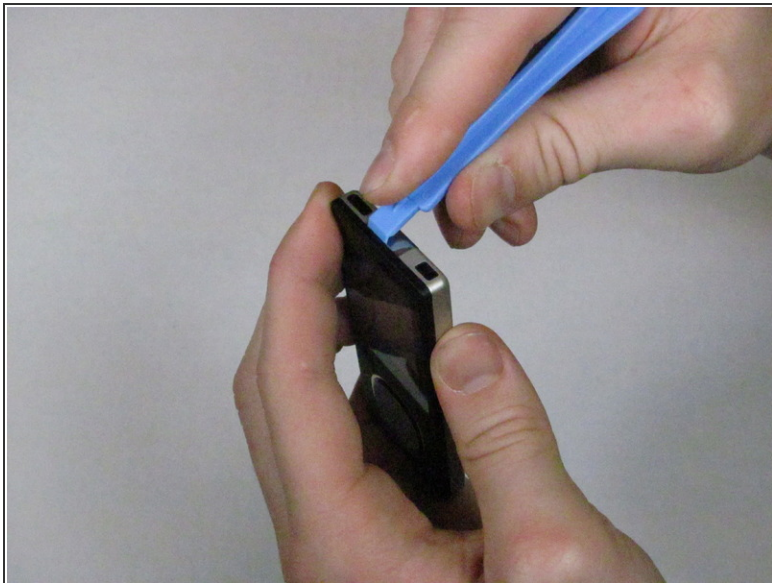


- Remove the top metal clip by inserting a Zune opening tool in between the faceplate and back cover and pulling gently back as shown in the images.
- You should hear a 'click' as the clip detaches from the device.

## Step 3

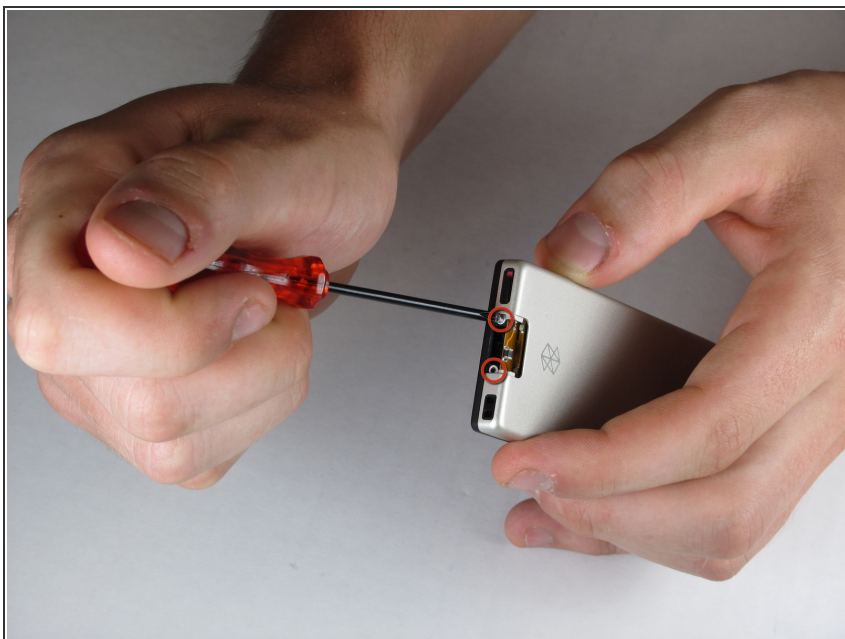

- Remove the two screws shown using a small Tri-Wing screwdriver.
- ⓘ You will need to use a very small Tri-Wing screwdriver to ensure that you do not strip the screws.

## Step 4

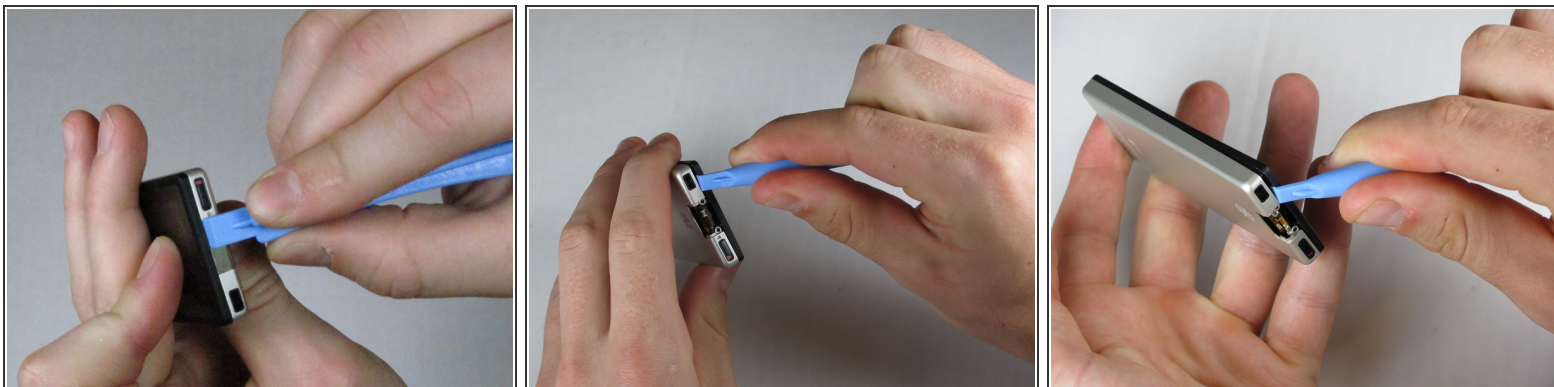


- Insert the Zune opening tool between the faceplate and the back cover, starting from the top and slowly work your way around the device.

## Step 5



- Work your way around the Zune until the back cover comes free. Remove the back plate and set it aside.



## Step 6 — Communications Board

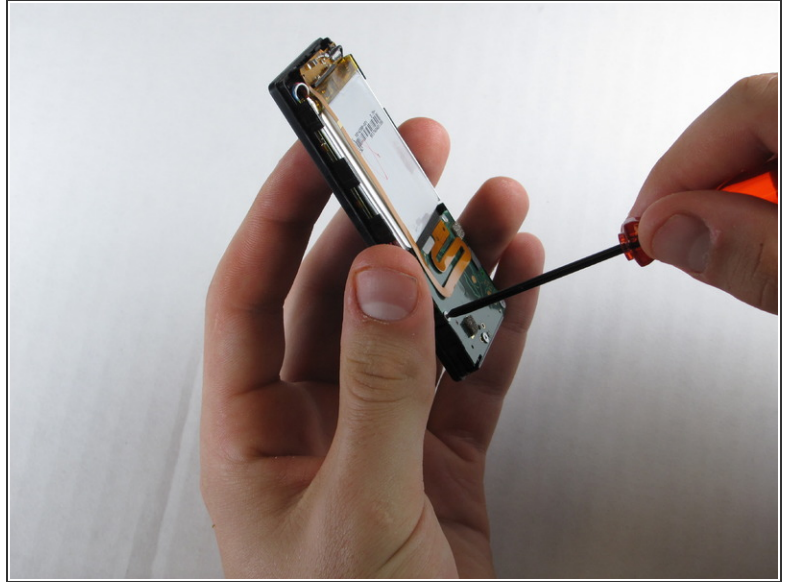

- Remove the three screws (5.5mm by 3mm) from the backside of the Zune using a small Tri-Wing screwdriver.




## Step 7

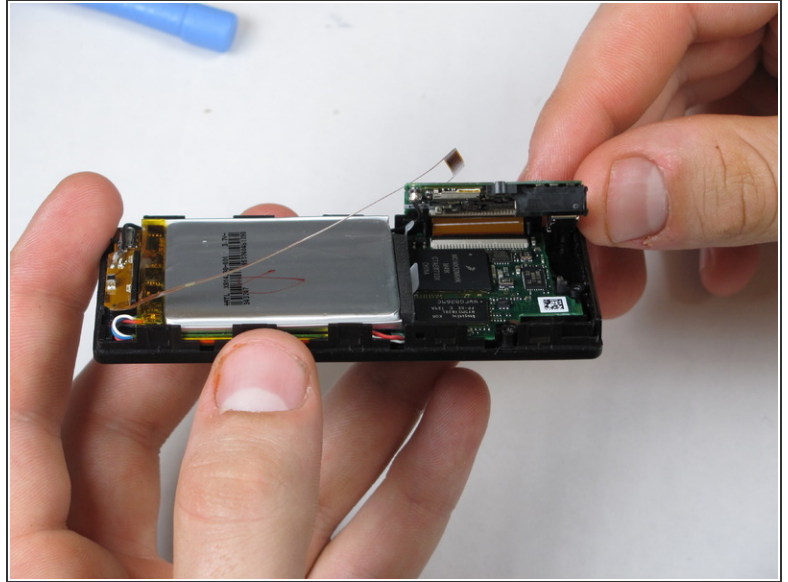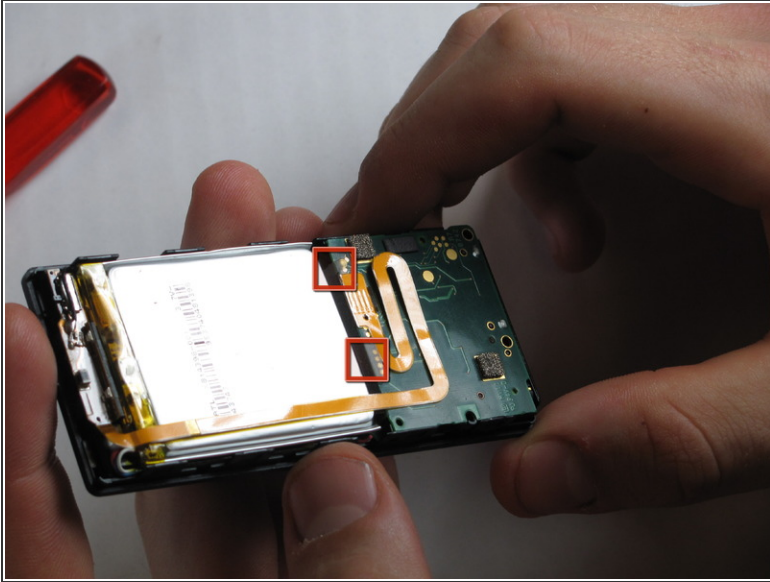

- Use your finger to pry back the two clear flaps.
- Slowly lift the communications board that was held down by the clear flaps.

⚠ Be careful not to accidentally detach the slim ribbon that connects between the communications board and the device.

## Step 8

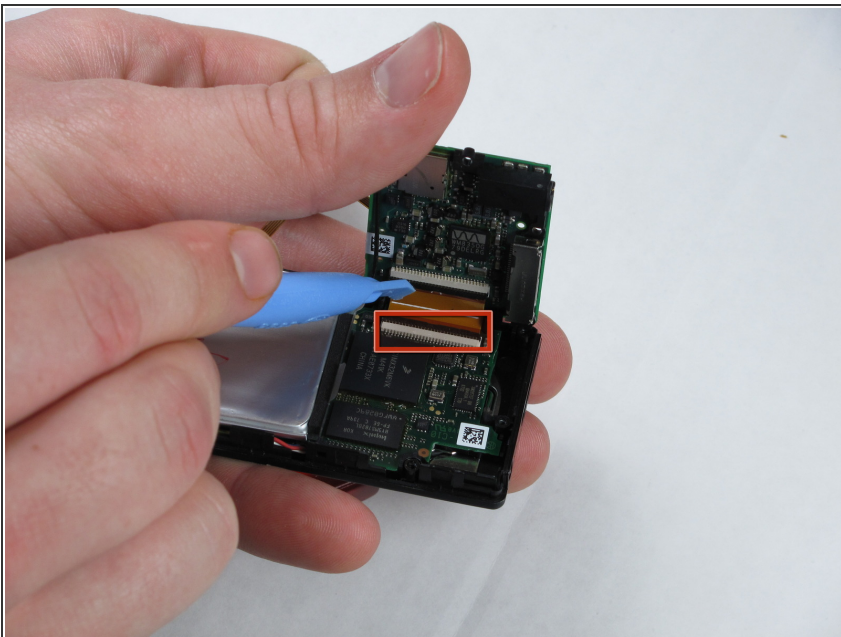

- Disconnect the ribbon cable with the Zune opening tool by flipping up the black plastic flap where the ribbon cable connects to the memory board.
- Pull the ribbon cable out of the memory board.

## Step 9



- Peel the slim ribbon cable off the communications board using your fingers.
- ⓘ This slim ribbon is attached using an adhesive, so it cannot be reattached without more adhesive.

## Step 10



- Pull the cable connector straight up using your fingers.
- Communications board remains.

To reassemble your device, follow these instructions in reverse order.



This document was last generated on 2017-07-22 05:16:37 PM.